

# PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

|  |   |  |
|--|---|--|
| Applicant's or agent's file reference<br><b>PHNL000344W0</b> | <b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below. |  |
| International application No.<br><b>PCT/EP 01/ 00109</b>     | International filing date (day/month/year)<br><b>05/01/2001</b>   | (Earliest) Priority Date (day/month/year)<br><b>12/01/2000</b> |
| Applicant<br><b>KONINKLIJKE PHILIPS ELECTRONICS N.V.</b>     |   |  |

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

### 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,



the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,



the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.



as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

3



None of the figures.

**THIS PAGE BLANK (USPTO)**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number  
**WO 01/52550 A1**

(51) International Patent Classification<sup>7</sup>: **H04N 7/26,**  
7/30, 7/50

Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).  
**BRÜLS, Wilhelmus, H., A.** [NL/NL]; Prof. Holstlaan 6,  
NL-5656 AA Eindhoven (NL).

(21) International Application Number: **PCT/EP01/00109**

(22) International Filing Date: **5 January 2001 (05.01.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
00200094.1 12 January 2000 (12.01.2000) EP  
00200871.2 10 March 2000 (10.03.2000) EP  
00202081.6 15 June 2000 (15.06.2000) EP

(71) Applicants (for all designated States except US): **KONTINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KLEIN GUNNEWIEK, Reinier, B., M.** [NL/NL]; Prof. Holstlaan 6,  
NL-5656 AA Eindhoven (NL). **HOLL, Mathieu** [FR/NL];  
Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **GROENENDAAL, Antonius, W., M.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): **CN, IN, JP, KR, US.**

(84) Designated States (regional): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**

[Continued on next page]

(54) Title: **IMAGE DATA COMPRESSION**

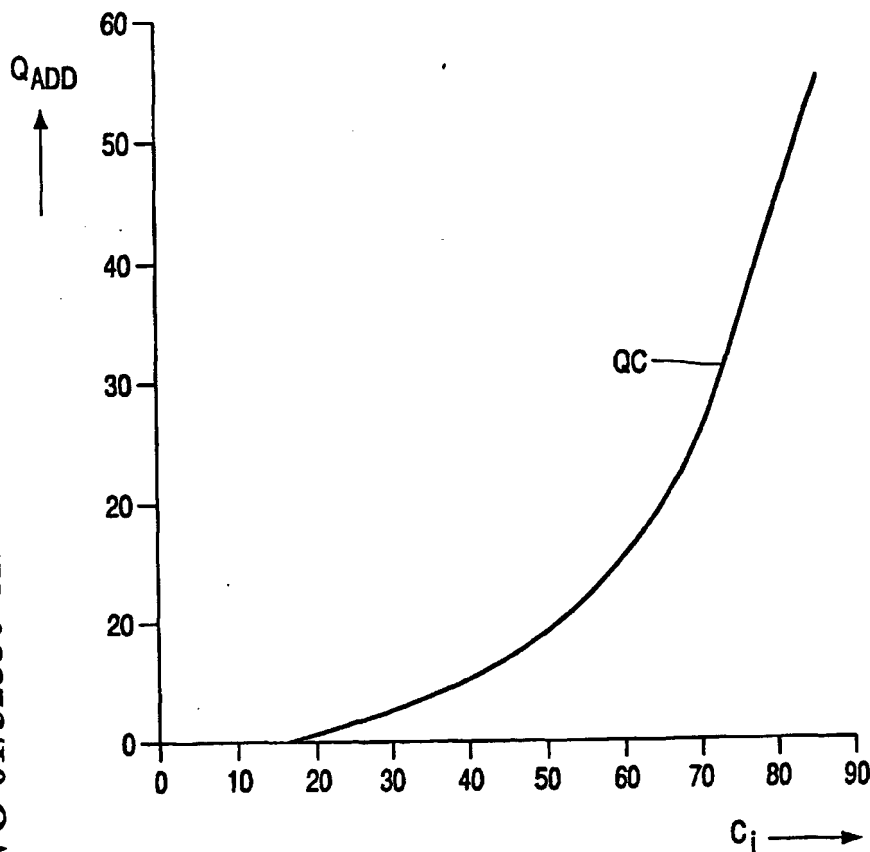

(57) Abstract: A method and a device are provided, in which a signal is encoded to obtain a bit-stream. Blocks of quantized transform coefficients are provided. Transform coefficients corresponding to higher frequencies are attenuated more than coefficients corresponding to lower frequencies. For attenuating higher-frequency coefficients, the invention provides a curve (QC) with higher quantization step-size ( $Q_{ADD}$ ) for transform coefficients ( $C_i$ ) corresponding to higher frequencies. Because this additional quantization step size ( $Q_{ADD}$ ) is put in the resulting bit-stream, the reconstruction is performed with an original quantization step-size, without taking the additional quantizing into account. Therefore, a reconstructed coefficient will have a lower value than an original coefficient ( $C_i$ ). Bit rates can easily be regulated by shifting the curve (QC) to lower or higher frequencies and/or multiplying the curve (QC).

WO 01/52550 A1

**THIS PAGE BLANK (USPTO)**

Image data compression

09/936137

1

The invention relates to a method, a device and a transmitter, in which an image signal is encoded to obtain a bit-stream. The invention further relates to transcoding. The invention also relates to a receiver, a bit-stream and a storage medium.

5

EP-0 514 663 A2 discloses an apparatus and method for motion video encoding employing an adaptive quantizer. The MPEG video standard defines a layered architecture for compressing a video sequence. First, a sequence of video pictures is subdivided into disjoint Groups Of Pictures (GOPs). Each GOP is compressed independently of other GOP's to facilitate random access to any picture and also to limit the propagation of transmission errors. Every picture in a GOP is subdivided into Macro-Blocks (MBs). For a color picture, an MB is a collection of 16x16 luminance pixels and two 8x8 blocks of chrominance pixels. In MPEG, the two chrominance components are both sampled at half the horizontal and vertical resolution of the luminance. As such, an MB completely describes a 16x16 color segment of a picture. In an MB the 16x16 luminance pixels are further subdivided into four luminance blocks of 8x8 pixels. The still or motion picture data in the form of MBs, represented by either the actual pixel data (intra-mode) or only the error data (predictive), is inputted to a transformation. This transformation is a two-dimensional Discrete Cosine Transform (DCT) applied to each of the MBs. After applying the DCT, the resulting coefficients undergo a quantization step. The DCT transform coefficients are uniformly quantized with a matrix of quantization steps. MPEG specifies one of two reference matrices from which the quantization steps may be derived. The choice of which matrix is used, depends on the MB mode. Although the reference matrices can be defined by the encoder at the beginning of a video sequence, they remain fixed afterwards. MPEG allows dynamic changes to the matrix of quantization steps, however, by allowing a scaling factor for the reference matrices. This scaling factor can be changed for every MB. The adaptation of this scaling factor is performed on an MB to MB basis and varies based on the complexity of the image and the available rate control requirements.

An object of the invention is to provide further compression. To this end, the invention provides a method, a device, a transmitter, a transcoder, a receiver, a bit-stream and a storage medium as defined in the independent claims. Advantageous embodiments are defined in the dependent claims.

5           In a first embodiment of the invention, blocks of transform coefficients are provided and higher-frequency transform coefficients are attenuated more than lower-frequency transform coefficients of the given block. The invention is based on the insight that especially for obtaining low bit-rates, attenuating higher-frequency transform coefficients is more advantageous than increasing a step-size for all transform coefficients. Increasing the  
10       step-size causes accumulation of errors in predictively coded pictures, because each predictively coded picture is predicted from a previous picture. In this way, errors will accumulate over a GOP. A resulting coding artifact can be seen as "breathing" of the picture quality over a time interval of a GOP which is normally about half a second. The invention provides further compression by attenuation of higher-frequency coefficients. Lower-  
15       frequency coefficients are less or not attenuated. Preferably, some of the lower-frequency coefficients remain unaffected. The accumulation of errors is herewith reduced.

          For attenuating higher-frequency coefficients, the invention provides a curve with higher quantization step for higher-frequency transform coefficients. Because no curve information is put in the resulting bit-stream, the reconstruction is performed by using an  
20       original quantization scaling factor only. The quantization according to the invention can be seen as additional quantization, which is not taken into account in a reconstruction. Therefore, a reconstructed coefficient will have a lower value than an original coefficient. It should be noted that this curve represents a quantization step as function of coefficient number (position in the block). The curve therefore may depend on the scanning order of the  
25       coefficients in the block. Further, the curve can be construed as a weighting matrix, where higher-order (higher-frequency) coefficients have a higher attenuation (higher quantization step) than the lower order (lower-frequency) coefficients.

          The bit rate can easily be regulated by shifting the curve to lower or higher frequencies and/or multiplying the curve.

30           In advantageous embodiments, wherein high frequency transform coefficients in a plurality of blocks are attenuated, the blocks are adaptively attenuated depending on their content to prevent occurrence of artifacts. For example, chrominance blocks are less attenuated than luminance blocks, or blocks with high-energy content are less attenuated than other blocks. In another advantageous embodiment according to the invention, at least one

selected high-frequency transform coefficient is not attenuated to provide reduction of artifacts. Such a selected high-frequency transform coefficient has e.g. a frequency higher than a given frequency threshold and an amplitude higher than a given amplitude threshold.

The aforementioned and other aspects of the invention will be apparent from  
5 and elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 shows a block of transform coefficients;

Fig. 2 shows an illustration of perceived picture quality as function of time  
10 when a higher step-size is used to encode an image signal;

Fig. 3 shows a preferred quantization curve according to the invention;

Fig. 4 shows an embodiment of a transmitter according to the invention;

Fig. 5 shows an embodiment of a receiver according to the invention  
comprising a bit rate transcoder; and

15 Fig. 6 shows a further bit rate transcoder that may be included in the receiver  
of Fig. 5.

The drawings only show those elements that are necessary to understand the  
invention.

20 Fig. 1 shows a block of transform coefficients. These coefficients  $C_i$  are  
obtained by transforming a block of data from a spatial domain to a frequency domain. In this  
example, a picture is encoded per block of 8 by 8 pixels. The result of the transformation is a  
block of 8 by 8 transform coefficients (so  $i = 0 \dots 63$ ). From the left to the right in the block, the  
horizontal spatial frequency increases. From the top to the bottom, the vertical spatial  
25 frequency increases. The upper-left coefficient  $C_0$  represents a DC coefficient. Although  
various transformations may be used, preferably DCT transformation is performed. In Fig. 1,  
a zigzag scanning is used to obtain an order of transform coefficients  $C_i$ . Although another  
scanning may be used, zigzag scanning is widely used, e.g. in MPEG.

In MPEG, coefficients  $C_i$  are quantized by dividing them by a weight in a  
30 predefined quantization matrix and by a quantization scaling factor. The quantization scaling  
factor is adapted per macro block. The weights in the quantization matrix are so arranged that  
the less important coefficients are coded with less accuracy.

One way of reducing a bit rate would be to use a higher quantization scaling  
factor. Errors introduced by using a higher quantization scaling factor affect the picture

quality. In a predictive coding method, like MPEG, errors in a given picture affect another picture when the given picture is used to predict the other picture. The degradation of intra-coded pictures is usually limited.

5 An error made in a picture that is used as a predictor is forwarded to a predicted picture. Accumulation of errors takes place, depending on the number of predictions that is made. The accumulation of errors gives rise to annoying effects. The perceived quality between a beginning and an end of a GOP differs significantly. This effect is illustrated in Fig. 2. A Perceived picture quality  $P_{pq}$  is shown as function of time  $t$ . This effect may be called "breathing", i.e. the  $P_{pq}$  decreases during a GOP and increases suddenly  
10 with a new, refreshing I picture.

Attenuating higher-frequency coefficients  $C_i$  according to the invention reduces this accumulation of errors. In a preferred embodiment, the coefficients are quantized with an additional quantization step size  $Q_{ADD}$ . Because this additional quantization step is not put in the resulting bit-stream, the reconstruction is performed with the quantization  
15 scaling factor and the quantization matrix without taking into account the additional quantization. Therefore, a reconstructed coefficient will have a lower value than an original coefficient  $C_i$ . As a result, the coefficient  $C_i$  has been attenuated. To reflect the lower importance of higher frequencies, the DCT coefficients are quantized with a variable quantization step depending on their position. Fig. 3 shows a curve QC showing the  
20 additional quantization step size  $Q_{ADD}$  as a function of a position of the quantized transform coefficient  $C_i$ . In this embodiment the quantization step  $Q_{ADD}$  gradually increases for higher-frequency transform coefficients  $C_i$ . The lowest coefficients  $C_i$  are not affected, keeping their value from the incoming stream. This is done to protect the low frequencies to which the eye is very sensible. In a practical embodiment 8 coefficients always remain unaffected. Keeping  
25 the lower frequencies unaffected, is advantageous in preventing the accumulation of errors.

It would have been possible to remove every coefficient after a given position in the DCT coefficient order. However, due to a particularity of the DCT, that would have given rise to a deterioration of lower frequencies. In fact, the DCT is a kind of bank filter, which extracts a value for a range of frequencies, i.e. a DCT coefficient. The bank filter is  
30 however imperfect in that frequency ranges overlap each other. This means that a DCT coefficient contains energy in a quite large band. Therefore, quantizing a coefficient has some repercussions on lower frequencies. Thus, removing complete coefficients after a given position would not only remove the energy contained in high frequencies but also some energy contained in lower frequencies, because even a high frequency coefficient contains



energy in lower frequencies. Attenuating is therefore better than removing transform coefficients  $C_i$ . A smoothly increasing step-size is advantageous regarding the removing of energy from lower frequencies. In a practical embodiment, a logarithmic function is used.

For bit rate control, the curve QC may be shifted. The curve QC is shifted to the left to reduce the bit rate and shifted to the right to increase the bit rate. Preferably, some lower frequency transform coefficients should not be additionally quantized. If lower frequencies remain untouched, less errors are accumulated.

For further bit rate control, the curve QC may be multiplied by a certain multiplier. In case the multiplier is larger than one, the coefficients are more coarsely quantized and the bit rate is further reduced. In case the multiplier is smaller than one, the coefficients are less coarsely quantized and the bit rate is increased. Shifting and multiplying may be performed in combination or independently.

Advantage may be taken from the prediction tree to avoid the propagation of errors. Instead of quantizing pictures heavily at a beginning of a prediction sequence, it is advantageous to quantize last pictures in a prediction sequence more heavily. In this way, predictions are made from rather good images. In a GOP with one I (intra-coded) picture followed by P (predictively coded) pictures, the P-pictures are in general quantized more heavily than the I-picture. Further a last P picture may be quantized even more heavily. Since about 25 pictures are displayed per second, one picture is displayed for only 0.04 second. During this very short lap of time, the human eye does not observe a drop in quality. Squeezing the last P picture is possible resulting in an extreme low number of bits used. The current P picture is of low quality, but this is no problem because the viewer does not notice the drop in quality and the last P picture is not used to predict another picture. This strategy can also be used for B (bi-directional predictively coded) pictures as they are also at an end of a prediction sequence. Generally, the B-pictures are quantized more heavily than the P-pictures but they cannot be quantized as coarsely as the last P-picture, since there are more than one B pictures in a GOP and repetitive drops in quality within a GOP tend to lower the global quality of the image as perceived. This strategy does not cause a breathing effect because errors that are forwarded to other pictures are smaller. Although it is possible to quantize more than one last P-picture more coarsely, this is less advantageous.

As discussed above, quantizing pictures more coarsely can be achieved by shifting or multiplying the quantization curve.

Fig. 4 shows an embodiment of a transmitter according to the invention. The transmitter 1 comprises means for obtaining a signal S, e.g. a camera 10. The transmitter

further comprises an encoding device 2. Although not necessary to the invention, the encoding device preferably encodes the image signal by using motion estimation and motion compensation. The device 2 therefore comprises a motion compensator MC 11 and a motion estimator ME 18. The motion compensator 11 furnishes a motion compensated difference  
5 signal to a transform coder 12. This transform coder 12 preferably applies a DCT transformation on the motion compensated signal. After the transformation, the transformed signal is quantized in quantizer Q 13. This is a standard quantization as is known from the prior art. To perform motion estimation, a reconstructed picture is necessary. Therefore, the device 2 comprises an inverse quantizer IQ 14 and an inverse transform coder IDCT 15 that  
10 perform inverse operations of Q 13 and DCT 12 respectively. In the inverse motion compensator IMC 16 that is coupled to the ME 18 the reconstructed picture is obtained. The reconstructed picture is stored in the picture memory MEM 17. The reconstructed picture is used for motion estimation in a next picture that has to be encoded. The quantized motion compensated signal as obtained in Q 13 is furnished to an additional quantizer Q<sub>ADD</sub> 19  
15 according to the invention. The Q<sub>ADD</sub> 19 applies an additional quantization to the signal with a curve as shown in Fig. 3. The signal is thereafter encoded in the Variable Length Encoder VLE 20 to obtain a video elementary stream V. A bit rate R of the video stream V is derived in VLE 20 and furnished to CPU 21. The CPU 21 is coupled to Q<sub>ADD</sub> 19 to control the bit rate by shifting and/ or multiplying the curve. The CPU 21 also controls other parts of the  
20 device 2. Q<sub>ADD</sub> may be defined for blocks of 8x8 pixels. The quantization scale factor used in Q 13 is defined per macroblock.

The Q<sub>ADD</sub> is preferably located outside the encoding loop MC 11...ME 18. This means that e.g. for motion compensation, a better quality is available than from the additionally quantized signal. This is important, because a good quality of the reconstructed  
25 picture means that better encoding can be obtained, in the case of motion compensation due to a better motion estimation. The better motion estimation is performed, the better is the compression of the signal S. The video stream V is multiplexed with other streams, e.g. an audio elementary stream A in a multiplexer 22 to obtain a transport/ program stream TS.

Coding bit-streams from an original bit-rate R1 to a new bit-rate R2 is called  
30 bit-rate transcoding. Bit-rate transcoding is e.g. performed to unify incoming bit-streams that vary in bit-rate. Further, the bit rates used for broadcasting are usually too high for storage on digital storage media, given the condition that enough playing time should be available. Therefore, bit rate reduction is often necessary. Furthermore, for implementation of long-play mode a low bit rate is required. The invention is preferably applied in a bit rate transcoder.

Such a bit rate transcoder may be included in a digital video recorder. A common practice for bit rate transcoding is cascading a decoder and an encoder. A common decoder may be cascaded with an encoder according to the invention, which encoder attenuates high-frequency transform coefficients of DCT blocks, e.g. the encoder 2 from Fig. 4.

5                Fig. 5 shows an embodiment of a receiver (e.g. digital video recorder like D-VHS). The receiver 3 comprises receiving means 4 and a preferred bit rate transcoder 5. An incoming transport/ program stream TS1 is received in receiving means 4, e.g. an antenna system, and thereafter de-multiplexed in a de-multiplexer 50 to obtain a video elementary stream V1 and an audio elementary stream A1. The transport stream TS1 may be transmitted  
10 by an embodiment as shown in Fig. 4. The video elementary stream V1 is passed to a Variable Length Decoder (VLD) 51 to obtain blocks of transform coefficients  $C_i$ . The audio elementary stream A1 is bypassed because transcoding an audio elementary stream will hardly affect the bit rate. After the VLD 51, the decoded video stream is furnished to a quantizer  $Q_{ADD}$  52 according to the invention. In  $Q_{ADD}$  52, the higher frequency coefficients  
15 are attenuated as explained above. The additional quantized video stream is furnished to a Variable Length Encoder (VLE) 53 to obtain a new video elementary stream V2. As in Fig. 4, a bit rate R2 is derived in the VLE 53 and furnished to a CPU 54 to control the  $Q_{ADD}$  52. The new video stream V2 is multiplexed together with the parsed audio stream A1 in a multiplexer 55 to obtain a new transport stream TS2. The new transport stream TS2 has a  
20 lower bit rate than the incoming transport stream TS1. The new transport stream TS2 may be stored on a storage medium 6. The storage medium 6 may be a DVD, a CD-ROM, a (D-VHS) tape, etc.

Fig. 6 shows a further preferred bit rate transcoder 7, which may replace the transcoder 5 in the receiver of Fig. 5. The transcoder 7 is derived from a full decoder-encoder  
25 cascading and is based on a simplification of the encoder part. In a full decoder-encoder, the encoder computes motion vectors. These motion vectors are only used to construct a bit-stream in the encoder. It is likely that the motion vectors found by the motion estimation in the encoder of the full decoder-encoder are not different from the motion vectors  $v$  in an original bit-stream. Or, at least, new motion vectors refer to macro-blocks, which values are  
30 close to the values of macro-blocks referred to by the original vectors. Therefore, it is a great improvement from a complexity point of view to reuse the original motion vectors in the transcoder. In the transcoder 7, quantized transform coefficients are de-quantized in an inverse quantizer 70 to obtain de-quantized transform coefficients. The de-quantized transform coefficients are re-quantized in a quantizer 72. In Fig. 6, a feedback loop is

illustrated for compensating a re-quantization error, which is due to a new, higher quantization step size in the quantizer 72. This extra quantization introduces extra coding errors. In order to prevent leakage of these errors, these errors are compensated. As these errors affect images which are predicted from the current image, motion compensation is applied to these errors in motion compensator 77 with use of the original motion vectors  $v$ . The motion compensated errors are subtracted from a next anchor frame in subtractor 71. Therefore, the reconstructed image will not be affected by the error made in the previous image. This avoids error accumulation. The feedback loop further comprises an inverse quantizer 73, a subtractor 74 and an inverse DCT unit 75 to obtain the re-quantization error. A memory 76 stores the re-quantization error. The motion compensated error is transform coded in a DCT unit 78 to furnish a transform coded motion compensated re-quantization error to the de-quantized signal. In case the motion compensator 77 is suitable for performing DCT domain motion compensation, the IDCT unit 75 and the DCT unit 78 may be omitted. Although Fig. 6 shows that  $Q_{ADD}$  52 is placed outside the error compensation loop 73-78, it will be clear to a person skilled in the art that the  $Q_{ADD}$  52 may also be placed inside this loop, if desired, e.g. for better error compensation. the  $Q_{ADD}$  52 can be placed inside the error compensation loop 73-78 by e.g. coupling the output of  $Q_{ADD}$  52 to the input of IQ 73 rather than coupling the input of  $Q_{ADD}$  52 to the input of IQ 73.

The complexity of the bit rate transcoder according to Fig. 6 is lower than the full decoder-encoder. Nevertheless, the complexity is higher than the bit rate transcoder 5 of Fig. 5.

Due to the extreme low complexity of the proposed algorithm by the present invention, it is well suited for applications, especially for transcoding, which demand high throughput, like High Definition bit-streams. HD bit-streams can be re-quantized to a lower bit-rate, while the resolution remains the same. A preferred application of the invention reduces the bit-rate of an HD-stream for storing the lower bit-rate HD-stream on a storage medium. Another preferred application is a long play mode in Standard Definition (SD).

For some blocks, artifacts caused by attenuating high-frequency coefficients are more likely than for other blocks. Thus if blocks out of a plurality of blocks (e.g. a group of blocks, or one or more pictures) are each similarly attenuated, some annoying artifacts may occur for some blocks, which artifacts may accumulate. In a further embodiment of the invention, the artifacts are minimized by adapting the attenuation curve for certain blocks, depending on their block contents. Blocks that may cause some artifacts are less severely attenuated (or even not attenuated) than blocks that cause less or no trouble. Because in

general only blocks with certain special properties cause artifacts, the amount of blocks that should be less severely attenuated is low. Therefore, the less severe compression only has a minor influence on the total compression. Examples of blocks that are advantageously less attenuated than other blocks are given below.

5 First, blocks of chrominance coefficients are attenuated less severe than blocks of luminance coefficients. This especially prevents artifacts when moving objects are present that have different color, but similar luminance. Because in most encoders, motion estimation/ compensation is performed on the luminance only, moving objects with similar luminance are badly detected. The information on these moving objects is then mainly  
10 present in the chrominance blocks. Therefore, it is important keep most of the chrominance information. Further, because color information amounts for a small quantity compared to luminance information, no or only faint attenuation has only a minor effect on the overall compression. To obtain a simple embodiment, a fixed amount of attenuation (e.g. zero) may be chosen for the chrominance samples.

15 Further, blocks with a high energy content, e.g. blocks with large amplitudes for higher frequencies, may be attenuated less severely than blocks with a lower energy content. A high energy content often indicates a poor motion estimation/ compensation, resulting in a high energy residue. It is important not to largely affect these high-energy residues, in order to provide accumulation of errors.

20 In another embodiment of the invention, in which artifacts are further reduced, selected coefficients are not subjected to the attenuation, but transmitted unaffectedly, while other coefficients are subjected to the attenuation curve. The selected coefficients include coefficients that have both a frequency above a certain frequency threshold and an amplitude above a certain amplitude threshold. The amplitude threshold may be the same for all  
25 frequencies, but may also depend on the frequency.

In general, if high frequencies are found with high amplitudes, e.g. above a certain threshold, the attenuation curve may be shifted or multiplied (with a factor  $<1$ ) to lessen the strength of the attenuation, and/ or certain coefficients may be selected to be unaffected by the attenuation.

30 It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. The word 'picture' also refers to frame, field, etc. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word 'comprising' does not exclude the

presence of other elements or steps than those listed in a claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In a device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that  
5 certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

In summary, a method and a device are provided, wherein a signal is encoded to obtain a bit-stream. Blocks of quantized transform coefficients are provided. Transform coefficients corresponding to higher frequencies are attenuated more than coefficients  
10 corresponding to lower frequencies. For attenuating higher-frequency coefficients, the invention provides a curve QC with higher quantization step-size  $Q_{ADD}$  for transform coefficients  $C_i$  corresponding to higher frequencies. Because no information on this additional quantization step size  $Q_{ADD}$  is put in the resulting bit-stream, a reconstruction is performed with an original quantization step step-size, without taking the additional  
15 quantization into account. Therefore, a reconstructed coefficient will have a lower value than an original coefficient  $C_i$ . Bit rates can easily be regulated by shifting the curve QC to lower or higher frequencies and/or multiplying the curve QC.

## CLAIMS:

1. A method of encoding (2) a signal (S) to obtain a bit-stream (V,TS), the method comprising the steps of:  
providing (12,13) blocks of quantized transform coefficients ( $C_i$ ); and  
attenuating (19) higher-frequency transform coefficients ( $C_i$ ) of a given block  
5 more than lower-frequency transform coefficients of the given block.
2. A method as claimed in claim 1, the step of attenuating comprising:  
quantizing (19) the transform coefficients ( $C_i$ ) of the given block with a curve  
(QC) having higher quantization steps ( $Q_{ADD}$ ) for higher-frequency transform coefficients  
10 ( $C_i$ ), without putting information concerning said curve (QC) into the bit-stream (V,TS).
3. A method as claimed in claim 2,  
further comprising the step of shifting (19,21) the curve (QC) to adjust a bit  
rate (R) of the bit-stream (V,TS).  
15
4. A method as claimed in claim 2,  
further comprising the step of multiplying (19,21) the curve (QC) to adjust a  
bit rate (R) of the bit-stream (V,TS).
- 20 5. A method as claimed in claim 2, wherein the signal (S) comprises intra-coded  
and predictively coded pictures, the method comprising the step of:  
quantizing (19,21) predictively coded pictures at an end of a prediction  
sequence more coarsely than predictively coded pictures at a start of the prediction sequence.
- 25 6. A method as claimed in claim 1, the method further comprising the steps of:  
decoding (14,15) the blocks of quantized transform coefficients ( $C_i$ ) to obtain  
a reconstructed picture rather than decoding (14,15) the attenuated (19) high-frequency  
transform coefficients ( $C_i$ ).

7. A method as claimed in claim 1, the method further comprising:  
attenuating (19) high frequency transform coefficients ( $C_i$ ) in a plurality of blocks, wherein the blocks are adaptively attenuated depending on their content.
- 5 8. A method as claimed in claim 7, wherein chrominance blocks are less attenuated (19) than luminance blocks.
9. A method as claimed in claim 7, wherein blocks with an energy content higher than other blocks are less attenuated (19) than the other blocks.
- 10 10. A method as claimed in claim 1, wherein at least one selected high-frequency transform coefficient ( $C_i$ ) is not attenuated (19).
11. A method as claimed in claim 10, wherein the at least one selected high-  
15 frequency transform coefficient ( $C_i$ ) has a frequency higher than a given frequency threshold and an amplitude higher than a given amplitude threshold.
12. A device (2) for encoding a signal (S) to obtain a bit-stream (V,TS),  
comprising:  
20 means (12,13) for providing blocks of quantized transform coefficients ( $C_i$ );  
and  
means (19) for attenuating high-frequency transform coefficients ( $C_i$ ) of a given block.
- 25 13. A transmitter (1) comprising:  
means (10) for obtaining a signal (S); and  
a device (2) for encoding the signal (S) as claimed in claim 12.
14. A method of transcoding (5) an encoded signal (TS1,V1), comprising the steps  
30 of:  
decoding (50,51) the encoded signal (TS1,V1) to obtain blocks of quantized transform coefficients ( $C_i$ ); and  
attenuating (52) high-frequency transform coefficients ( $C_i$ ) of a given block.



15. A bit rate transcoder (5) for transcoding an encoded signal (TS1,V1) comprising:

means (50,51) for decoding the encoded signal (TS1,V1) to obtain blocks of quantized transform coefficients ( $C_i$ ); and

5 means for attenuating (52) high-frequency transform coefficients ( $C_i$ ) of a given block.

16. A bit rate transcoder (7) as claimed in claim 15, the bit rate transcoder (7) further comprising:

10 means (70,72) for re-quantizing the quantized transform coefficients to obtain re-quantized coefficients; and

a feedback loop (73-78,71) for compensating a re-quantization error;

the means for attenuating (52) being arranged to attenuate high-frequency coefficients in blocks of the re-quantized coefficients.

15

17. A receiver (3) comprising:

means (4,50) for obtaining an encoded signal (TS1,V1); and

a bit rate transcoder (5) for transcoding the encoded signal (TS1,V1) as claimed in claim 15.

20

18. A bit-stream (V,TS,V2,TS2) comprising blocks of quantized transform coefficients ( $C_i$ ), wherein high-frequency transform coefficients ( $C_i$ ) of a given block have been attenuated.

25 19. A storage medium (6) on which a bit-stream (V,TS,V2,TS2) as claimed in claim 18 is stored.

**THIS PAGE BLANK (USPTO)**

1/4

|                 |                 |                 |                 |                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| C <sub>0</sub>  | C <sub>1</sub>  | C <sub>5</sub>  | C <sub>6</sub>  | C <sub>14</sub> | C <sub>15</sub> | C <sub>27</sub> | C <sub>28</sub> |
| C <sub>2</sub>  | C <sub>4</sub>  | C <sub>7</sub>  | C <sub>13</sub> | C <sub>16</sub> | C <sub>26</sub> | C <sub>29</sub> | C <sub>42</sub> |
| C <sub>3</sub>  | C <sub>8</sub>  | C <sub>12</sub> | C <sub>17</sub> | C <sub>25</sub> | C <sub>30</sub> | C <sub>41</sub> | C <sub>43</sub> |
| C <sub>9</sub>  | C <sub>11</sub> | C <sub>18</sub> | C <sub>24</sub> | C <sub>31</sub> | C <sub>40</sub> | C <sub>44</sub> | C <sub>53</sub> |
| C <sub>10</sub> | C <sub>19</sub> | C <sub>23</sub> | C <sub>32</sub> | C <sub>39</sub> | C <sub>45</sub> | C <sub>52</sub> | C <sub>54</sub> |
| C <sub>20</sub> | C <sub>22</sub> | C <sub>33</sub> | C <sub>38</sub> | C <sub>46</sub> | C <sub>51</sub> | C <sub>55</sub> | C <sub>60</sub> |
| C <sub>21</sub> | C <sub>34</sub> | C <sub>37</sub> | C <sub>47</sub> | C <sub>50</sub> | C <sub>56</sub> | C <sub>59</sub> | C <sub>61</sub> |
| C <sub>35</sub> | C <sub>36</sub> | C <sub>48</sub> | C <sub>49</sub> | C <sub>57</sub> | C <sub>58</sub> | C <sub>62</sub> | C <sub>63</sub> |

FIG. 1

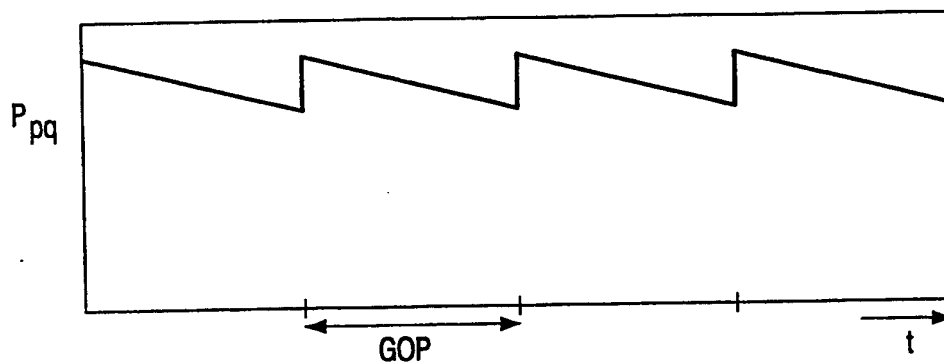


FIG. 2

JC12 Rec'd PCT/PTO 0 7 SEP 2001

**THIS PAGE BLANK (USPTO)**

09/936137

2/4

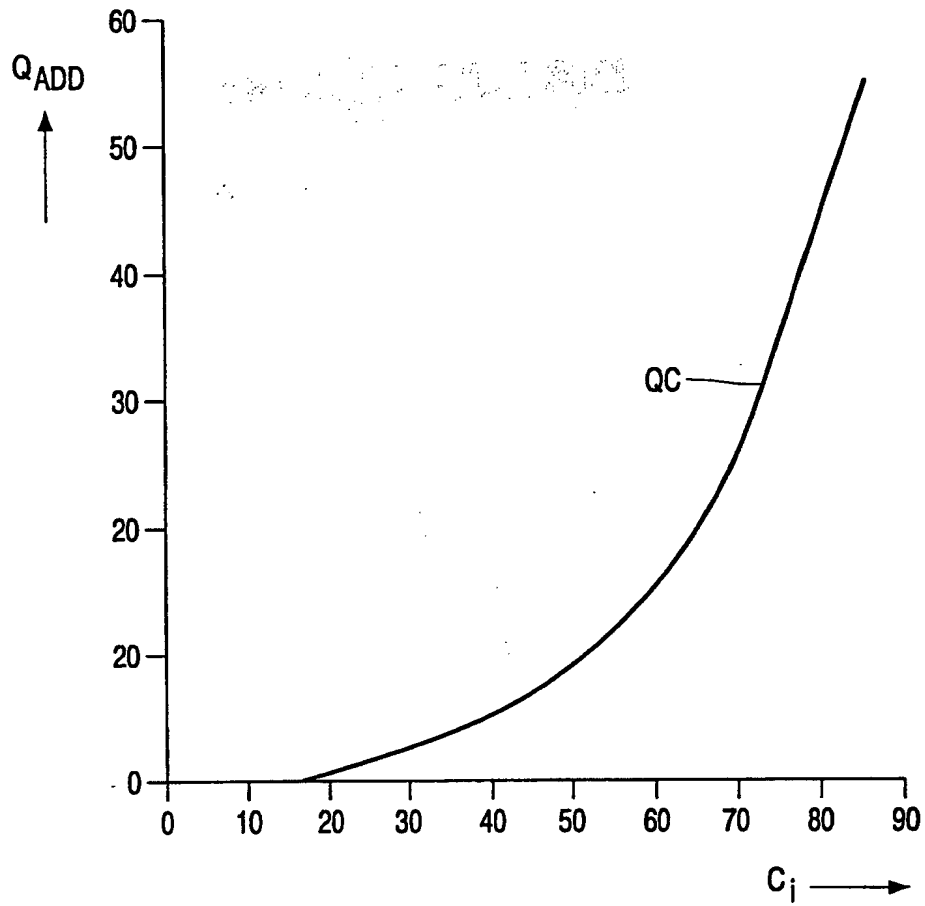


FIG. 3

JC12 Rec'd PCT/PTO 0 7 SEP 2001

**THIS PAGE BLANK (USPTO)**

3/4

09/936137

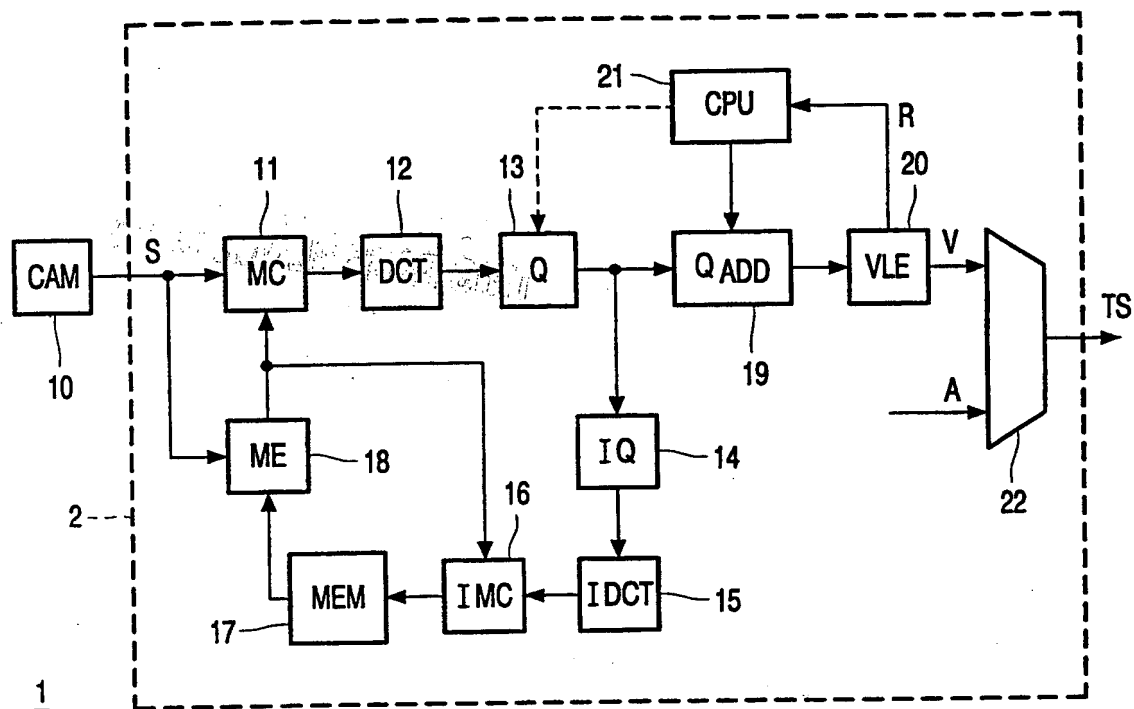


FIG. 4

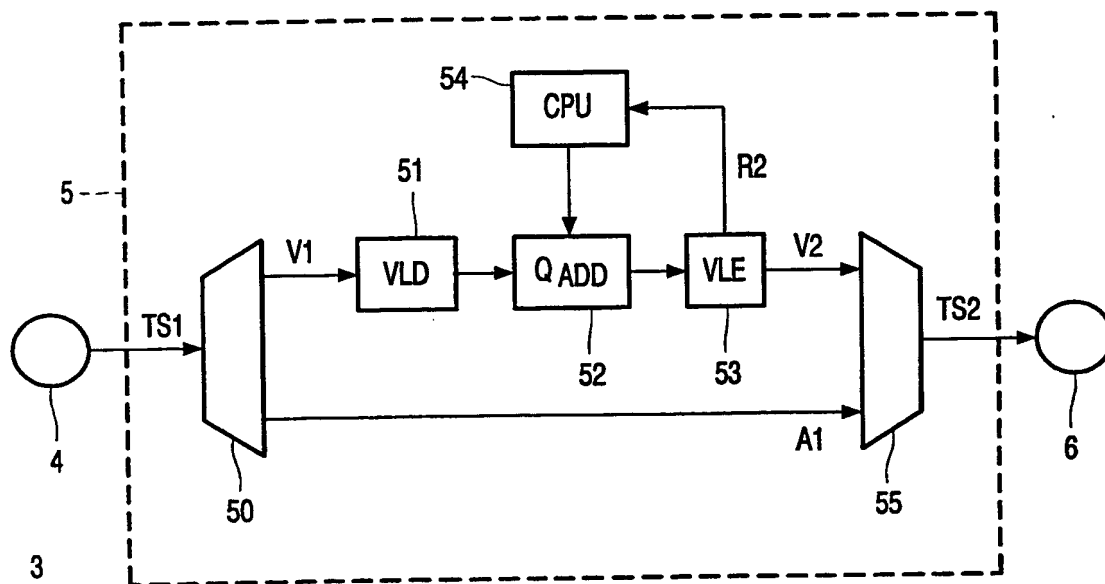


FIG. 5

JC12 Rec'd PCT/PTO 07 SEP 2005

**THIS PAGE BLANK (USPTO)**



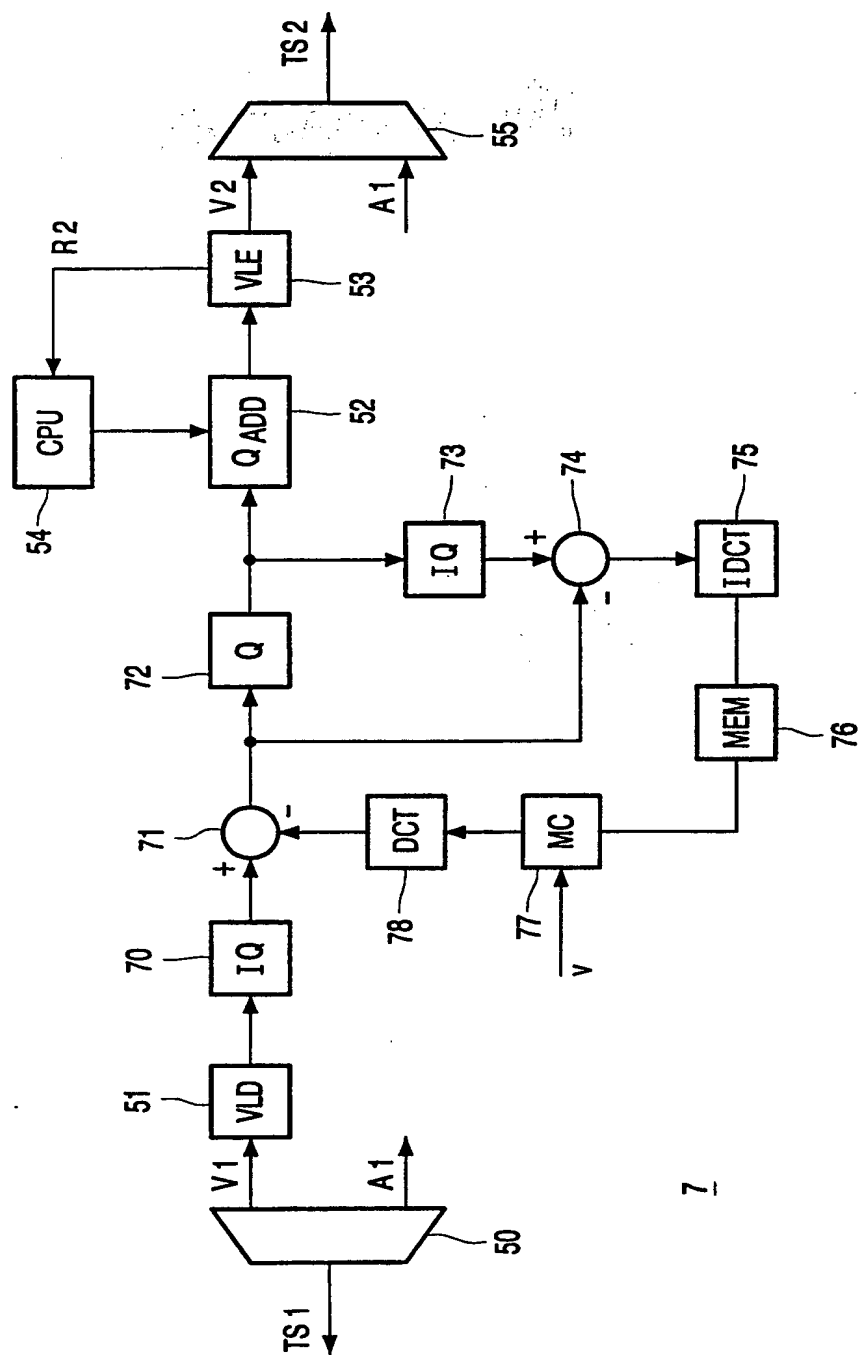


FIG. 6

JC12 Rec'd PCT/PTO n 7 SEP 2001

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/01/00109

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/26 H04N7/30 H04N7/50

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| X          | DE 197 18 802 A (INST RUNDFUNKTECHNIK GMBH) 12 November 1998 (1998-11-12)          | 1,2,12,               |
| Y          | abstract   | 13,18,19              |
| A          | column 3, line 20 - line 47  | 3-5,                  |
| A          | EP 0 590 922 A (XEROX CORP) 6 April 1994 (1994-04-06)                              | 7-11,                 |
|            | column 3, line 12 - line 45  | 14-17                 |
| Y          | DE 196 18 117 C (SIEMENS AG) 2 October 1997 (1997-10-02)                           | 6                     |
|            | abstract; claim 1  | 1-19                  |
|            | -/--   | 3,4                   |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*g\* document member of the same patent family

Date of the actual completion of the international search

13 June 2001

Date of mailing of the international search report

29/06/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Foglia, P

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/00109

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category ° | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|------------|--|-----------------------|
| Y          | US 5 592 226 A (DICKINSON BRADLEY W ET AL) 7 January 1997 (1997-01-07)<br>claim 7<br>---   | 5                     |
| Y          | US 5 051 840 A (WATANABE MIKIO ET AL) 24 September 1991 (1991-09-24)<br>abstract<br>---  | 7,9                   |
| Y          | US 5 162 898 A (AONO TOMOKO) 10 November 1992 (1992-11-10)<br>column 2, line 38 - line 56<br>---   | 8                     |
| A          | US 5 724 097 A (KURAHASHI SATOSHI ET AL) 3 March 1998 (1998-03-03)<br>abstract; claims<br>---  | 9                     |
| Y          | US 5 724 097 A (KURAHASHI SATOSHI ET AL) 3 March 1998 (1998-03-03)<br>abstract; claims<br>---  | 10,11                 |
| Y          | KEESMAN G ET AL: "Transcoding of MPEG bitstreams"<br>SIGNAL PROCESSING. IMAGE COMMUNICATION,NL,ELSEVIER SCIENCE PUBLISHERS, AMSTERDAM, vol. 8, no. 6, 1 September 1996 (1996-09-01), pages 481-500, XP004047113<br>ISSN: 0923-5965<br>paragraph '0002! - paragraph '0003!<br>----- | 14-17                 |

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 01/00109

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)   | Publication<br>date  |
|---|---------------------|--|--|
| DE 19718802 A                             | 12-11-1998          | NONE   |  |
| EP 0590922 A                              | 06-04-1994          | US 5379122 A<br>DE 69322351 D<br>DE 69322351 T<br>JP 6139351 A                               | 03-01-1995<br>14-01-1999<br>20-05-1999<br>20-05-1994                             |
| DE 19618117 C                             | 02-10-1997          | WO 9742767 A   | 13-11-1997   |
| US 5592226 A                              | 07-01-1997          | AU 1729495 A<br>CA 2182005 A<br>EP 0741945 A<br>JP 9509024 T<br>WO 9520863 A<br>US 5565920 A | 15-08-1995<br>03-08-1995<br>13-11-1996<br>09-09-1997<br>03-08-1995<br>15-10-1996 |
| US 5051840 A                              | 24-09-1991          | JP 2262786 A<br>JP 2552350 B   | 25-10-1990<br>13-11-1996   |
| US 5162898 A                              | 10-11-1992          | JP 2100465 A   | 12-04-1990   |
| US 5724097 A                              | 03-03-1998          | JP 7236142 A   | 05-09-1995   |

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/00109

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s)   | Publication<br>date  |
|---|---|---------------------|--|--|
| DE 19718802                               | A | 12-11-1998          | NONE   |  |
| EP 0590922                                | A | 06-04-1994          | US 5379122 A<br>DE 69322351 D<br>DE 69322351 T<br>JP 6139351 A                               | 03-01-1995<br>14-01-1999<br>20-05-1999<br>20-05-1994                             |
| DE 19618117                               | C | 02-10-1997          | WO 9742767 A   | 13-11-1997   |
| US 5592226                                | A | 07-01-1997          | AU 1729495 A<br>CA 2182005 A<br>EP 0741945 A<br>JP 9509024 T<br>WO 9520863 A<br>US 5565920 A | 15-08-1995<br>03-08-1995<br>13-11-1996<br>09-09-1997<br>03-08-1995<br>15-10-1996 |
| US 5051840                                | A | 24-09-1991          | JP 2262786 A<br>JP 2552350 B   | 25-10-1990<br>13-11-1996   |
| US 5162898                                | A | 10-11-1992          | JP 2100465 A   | 12-04-1990   |
| US 5724097                                | A | 03-03-1998          | JP 7236142 A   | 05-09-1995   |

**THIS PAGE BLANK (USPTO)**